
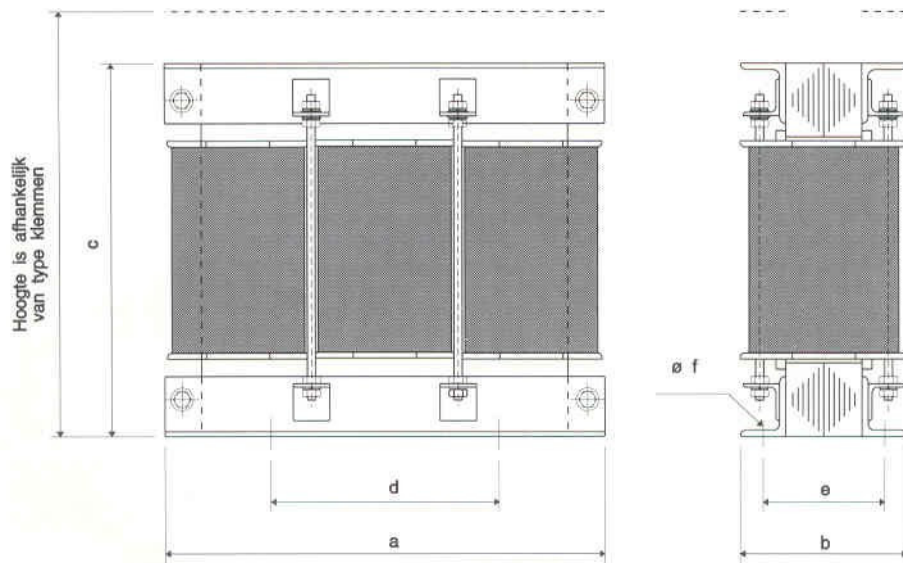


# DRIE

## TRANSFORMATOREN BV

### MAATVOERING 3-FASE OPEN UITVOERING IP00



Kern Type	Afmetingen in mm.						Totaal Gewicht ca. Kg
	a	b	c	d	e	f	
2tr. 100 / 085-255	510	175	425	400	130	14	2TR3S
2tr. 100 / 085-340	510	175	510	400	130	14	
2tr. 110 / 090-270	540	185	450	425	136	14	
2tr. 110 / 090-360	540	185	540	425	136	14	
2tr. 120 / 100-300	600	210	500	450	154	14	
2tr. 120 / 100-400	600	210	600	450	154	14	
2tr. 130 / 110-330	660	225	550	500	166	14	
2tr. 130 / 110-440	660	225	660	500	166	14	
2tr. 140 / 115-345	690	265	575	525	172	14	
2tr. 140 / 115/460	690	265	690	525	172	14	
2tr. 150 / 125-375	750	255	625	575	180	14	
2tr. 150 / 125-500	750	255	750	575	180	14	
2tr. 160 / 135-405	810	275	678	625	189	14	
2tr. 160 / 135-540	810	275	810	625	189	14	

MAATVOERING EN GEWICHTEN ONDER VOORBEHOUD.

**2TR3S**

De hoogte is afhankelijk van de soort klemmen.  
De maat "c" kan max. 70 mm hoger worden.