


MAATVOERING 3-FASE OPEN UITVOERING IP00

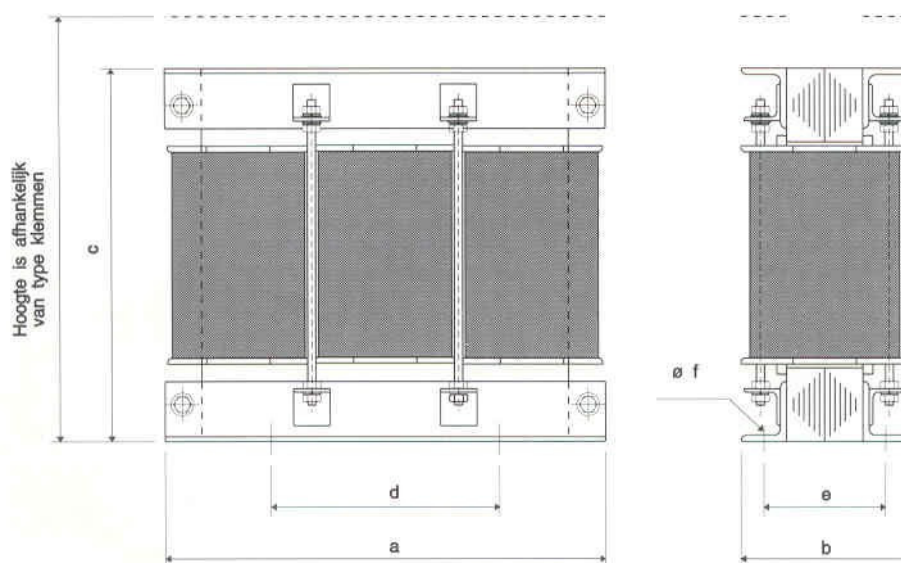

Kern Type	Afmetingen in mm.						Totaal Gewicht ca. Kg
	a	b	c	d	e	f	
3tr. 100 / 070-270	480	195	410	400	143	14	3TR3S
3tr. 100 / 090-270	540	195	410	400	143	14	
3tr. 110 / 075-300	525	205	460	440	151	14	
3tr. 110 / 100-300	600	205	460	440	151	14	
3tr. 120 / 085-315	570	215	495	470	160	14	
3tr. 120 / 105-315	630	215	495	470	160	14	
3tr. 130 / 090-345	615	250	535	510	184	14	
3tr. 130 / 115-345	690	250	535	510	184	14	
3tr. 140 / 095-375	660	260	575	550	195	14	
3tr. 140 / 125/375	750	260	575	550	195	14	
3tr. 150 / 105-405	720	290	625	600	214	14	
3tr. 150 / 135-405	810	290	625	600	214	14	
3tr. 160 / 110-435	765	300	665	640	222	14	
3tr. 160 / 145-435	870	300	665	640	222	14	
3tr. 170 / 120-465	825	310	705	690	231	14	
3tr. 170 / 188-465	930	310	705	690	231	14	
3tr. 180 / 125-480	855	315	750	715	240	14	
3tr. 180 / 160-480	960	315	750	715	240	14	
3tr. 190 / 130-510	900	325	790	755	248	14	
3tr. 190 / 170-510	1020	325	790	755	248	14	
3tr. 200 / 140-540	960	335	830	805	257	14	
3tr. 200 / 180-540	1080	335	830	805	257	14	

MAATVOERING EN GEWICHTEN ONDER VOORBEHOUD.

3TR3S

De hoogte is afhankelijk van de soort klemmen.
De maat "c" kan max. 70 mm hoger worden.