



DRIE

TRANSFORMATOREN BV



MAATVOERING 3-FASE OPEN UITVOERING IP00

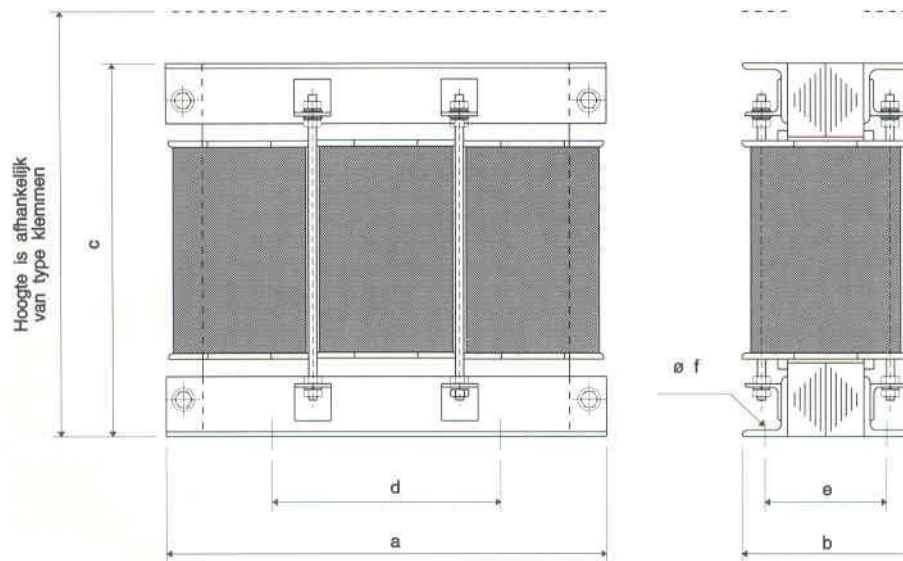

Kern Type	Afmetingen in mm.						Totaal Gewicht ca. Kg
	a	b	c	d	e	f	
5tr. 150 / 135-405	810	295	635	600	216	14	
5tr. 160 / 145-435	870	300	675	650	225	14	
5tr. 170 / 155-465	930	320	725	700	233	14	
5tr. 180 / 160-480	960	325	760	725	244	14	
5tr. 190 / 170-510	1020	345	800	775	253	14	
5tr. 200 / 180-540	1080	365	850	825	262	14	
5tr. 210 / 190-570	1140	385	890	875	271	14	
5tr. 220 / 200-600	1200	410	940	925	284	14	
5tr. 230 / 205-615	1230	420	975	950	295	14	
5tr. 240 / 214-645	1290	440	1015	1000	304	14	

MAATVOERING EN GEWICHTEN ONDER VOORBEHOUD.

5TR3S

De hoogte is afhankelijk van de soort klemmen.
De maat "c" kan max. 70 mm hoger worden.