


MAATVOERING 1-FASE OPEN UITVOERING IP00

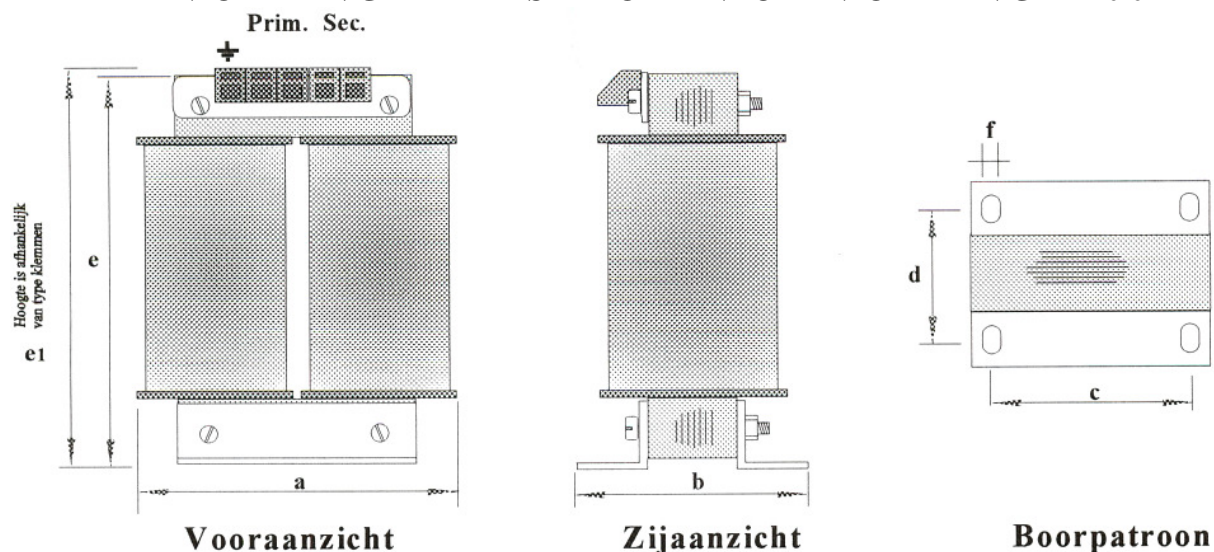

Koker Type	Kern Type	Afmetingen in mm.							Totaal Gewicht ca. Kg
		a	b	c	d	e	e1-max.	f	
UI 60/ 21	UI 60	80	53	50	39	113	153	4,8	
UI 60/ 31	UI 60	80	63	50	49	113	153	4,8	
UI 75/ 25.5	UI 75	100	67	63	50	139	179	5,8	
UI 75/ 41.5	UI 75	100	82	63	65	139	179	5,8	
UI 90/ 31.5	UI 90	120	76	76	57	164	214	7,0	
UI 90/ 41.5	UI 90	120	86	76	67	164	214	7,0	
UI 90/ 51.5	UI 90	120	96	76	77	164	214	7,0	
UI120/ 41	UI120	160	95	100	71	216	266	7,0	17
UI120/ 51	UI120	160	105	100	81	216	266	7,0	
UI120/ 61	UI120	160	115	100	91	216	266	7,0	
UI120/ 71	UI120	160	125	100	101	216	266	7,0	
UI120/ 75	UI120	160	129	100	105	216	266	7,0	
UI150/ 36	UI150	200	106	124	78	269	329	10,0	
UI150/ 52	UI150	200	122	124	94	269	329	10,0	
UI150/ 65	UI150	200	135	124	110	269	329	10,0	
UI150/ 77	UI150	200	147	124	122	269	329	10,0	
UI150/ 92	UI150	200	162	124	137	269	329	10,0	
UI180/ 63	UI180	240	153	144	125	310	370	10,0	35
UI180/ 78	UI180	240	168	144	140	310	370	10,0	
UI180/ 93	UI180	240	183	144	155	310	370	10,0	
UI210/ 63	UI210	280	163	176	133	370	430	12,0	61
UI210/ 73	UI210	280	173	176	143	370	430	12,0	
UI210/ 88	UI210	280	188	176	158	370	430	12,0	
UI210/103	UI210	280	203	176	173	370	430	12,0	
UI210/133	UI210	280	233	176	203	370	430	12,0	
UI240/ 83	UI240	320	193	196	157	420	485	13,0	112
UI240/110	UI240	320	220	196	184	420	485	13,0	
UI240/140	UI240	320	250	196	214	420	485	13,0	