



MAATVOERING 3-FASE OPEN UITVOERING IP00

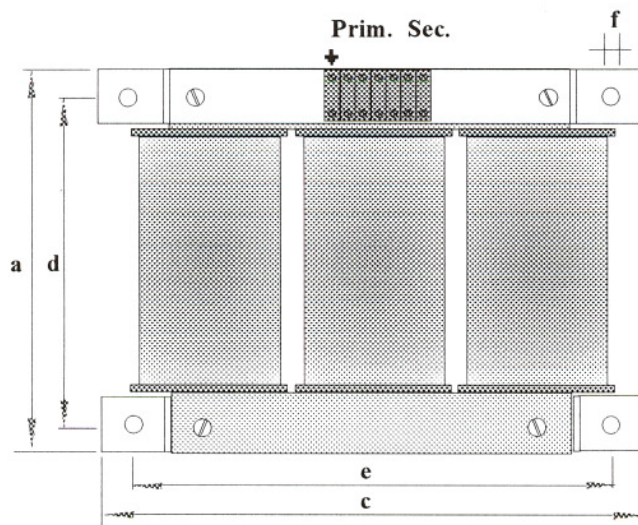

Vooraanzicht

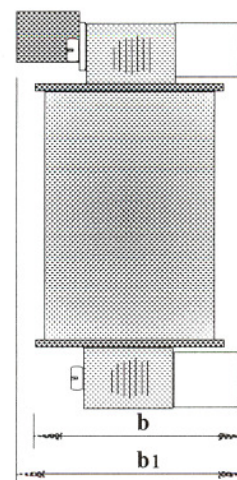

Zijaanzicht

Koker Type	Kern Type	Afmetingen in mm.							Totaal Gewicht ca. Kg
		a	b	b1-max.	c	d	e	f	
UI 75/ 25.5	EI125/125	125	68	98	185	100	165	7,0	
UI 75/ 41.5	EI125/125	125	83	113	185	100	165	7,0	
UI 90/ 31.5	EI150/150	150	78	108	206	120	184	7,0	
UI 90/ 41.5	EI150/150	150	88	118	206	120	184	7,0	
UI 90/ 51.5	EI150/150	150	98	128	206	120	184	7,0	
UI120/ 41	EI200/200	200	97	122	290	160	258	9,0	15,8
UI120/ 51	EI200/200	200	107	132	290	160	258	9,0	19,6
UI120/ 61	EI200/200	200	117	142	290	160	258	9,0	
UI120/ 71	EI200/200	200	127	152	290	160	258	9,0	
UI120/ 75	EI200/200	200	131	156	290	160	258	9,0	
UI150/ 36	EI250/250	250	100	140	330	200	298	9,0	
UI150/ 52	EI250/250	250	116	156	330	200	298	9,0	
UI150/ 65	EI250/250	250	129	169	330	200	298	9,0	
UI150/ 77	EI250/250	250	141	181	330	200	298	9,0	44,0
UI150/ 92	EI250/250	250	156	196	330	200	298	9,0	
UI180/ 63	EI300/300	300	143	183	394	240	358	9,0	
UI180/ 78	EI300/300	300	158	198	394	240	358	9,0	
UI180/ 93	EI300/300	300	173	213	394	240	358	9,0	57,5
UI210/ 63	EI350/350	350	151	191	452	280	408	13,0	
UI210/ 73	EI350/350	350	161	201	452	280	408	13,0	
UI210/ 88	EI350/350	350	176	216	452	280	408	13,0	
UI210/103	EI350/350	350	191	231	452	280	408	13,0	110
UI210/133	EI350/350	350	221	261	452	280	408	13,0	126
UI240/ 83	EI400/400	400	192	232	526	320	472	13,0	135
UI240/110	EI400/400	400	219	259	526	320	472	13,0	166
UI240/140	EI400/400	400	249	289	526	320	472	13,0	214