


MAATVOERING 3-FASE OPEN UITVOERING IP00

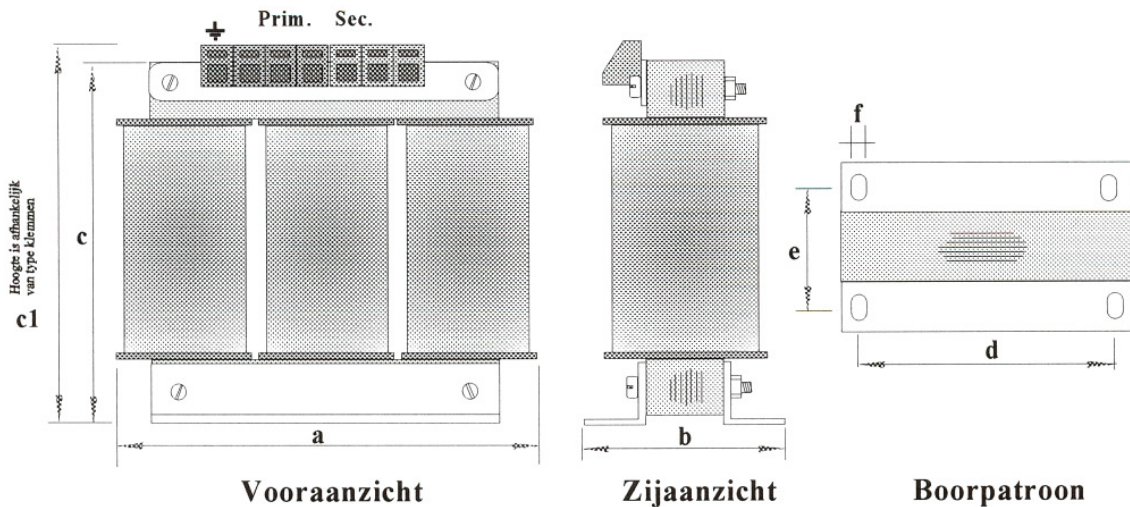

Koker Type	Kern Type	Afmetingen in mm.							Totaal Gewicht ca. Kg
		a	b	c	c1 max.	d	e	f	
UI 60/ 21	EI100/100	120	53	114	154	90	39	4,8	
UI 60/ 31	EI100/100	120	63	114	154	90	49	4,8	
UI 75/ 25.5	EI125/125	150	67	139	179	113	50	5,8	
UI 75/ 41.5	EI125/125	150	82	139	179	113	65	5,8	
UI 90/ 31.5	EI150/150	180	76	164	204	136	57	7,0	
UI 90/ 41.5	EI150/150	180	86	164	204	136	67	7,0	
UI 90/ 51.5	EI150/150	180	96	164	204	136	77	7,0	
UI120/ 41	EI200/200	240	91	215	255	185	71	7,0	15,8
UI120/ 51	EI200/200	240	101	215	255	185	81	7,0	19,6
UI120/ 61	EI200/200	240	111	215	255	185	91	7,0	
UI120/ 71	EI200/200	240	121	215	255	185	101	7,0	
UI120/ 75	EI200/200	240	125	215	255	185	105	7,0	25,0
UI150/ 36	EI250/250	300	106	269	314	224	78	10,0	
UI150/ 52	EI250/250	300	122	269	314	224	94	10,0	33
UI150/ 65	EI250/250	300	135	269	314	224	107	10,0	40
UI150/ 77	EI250/250	300	147	269	314	224	119	10,0	44
UI150/ 92	EI250/250	300	162	269	314	224	134	10,0	
UI180/ 63	EI300/300	360	153	310	355	264	125	10,0	58
UI180/ 78	EI300/300	360	168	310	355	264	140	10,0	70
UI180/ 93	EI300/300	360	183	310	355	264	155	10,0	
UI210/ 63	EI350/350	420	163	370	430	316	133	12,0	
UI210/ 73	EI350/350	420	173	370	430	316	143	12,0	88
UI210/ 88	EI350/350	420	188	370	430	316	158	12,0	110
UI210/103	EI350/350	420	203	370	430	316	173	12,0	126
UI210/133	EI350/350	420	233	370	430	316	203	12,0	
UI240/ 83	EI400/400	480	193	420	480	356	157	13,0	135
UI240/110	EI400/400	480	220	420	480	356	186	13,0	166
UI240/140	EI400/400	480	250	420	480	356	214	13,0	214
UI270/ 90	EI450/450	540	195	450	520	500	140	14,0	
UI300/100	EI500/500	600	235	500	570	500	165	14,0	300
UI300/120	EI500/500	600	255	500	570	500	185	14,0	355